




Złącze Proste Z Nakrętką Odmiana Ciężka Typ: Tn 132 S

Liczba wariantów: **45**

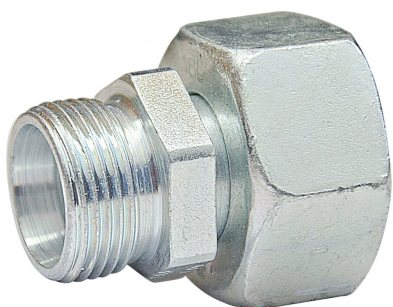

ZESKANUJ MNIE

Warianty produktu

Nr katalogowy TN132	Seria	Ø D1 mm	Ø D2 mm	Ciśnienie pracy bar	L1 mm	L2 mm	CH2 mm	CH3 mm	Ø F1 mm	CH mm	Waga 100 szt. kg TN132	Waga 100 szt. kg TN132A
1B-132AS0806Y	S	8	6	630	31	31	17	19	16x1,5	17	4,8	6,6
TN132-10/6S	S	10	6	630	32	31	17	22	18x1,5	17	3,8	7,1
1B-132AS1008Y	S	10	8	630	32	31	19	22	18x1,5	17	4,4	7,7
TN132-12/6S	S	12	6	630	33	32	17	24	20x1,5	17	4,3	8,2
1B-132AS1208Y	S	12	8	630	33	32	19	24	20x1,5	17	4,8	8,7
TN132-12/10S	S	12	10	630	32,5	33	22	24	20x1,5	19	6,2	10,1
1B-132AS1406Y	S	14	6	630	37	34	17	27	22x1,5	17	5,2	10,6
TN132-14/8S	S	14	8	630	37	34	19	27	22x1,5	17	5,7	11,1
1B-132AS1410Y	S	14	10	630	36,5	35	22	27	22x1,5	19	6,9	12,3
1B-132AS1412Y	S	14	12	630	36,5	35	24	27	22x1,5	22	7,4	12,8
TN132-16/6S	S	16	6	630	37	34	17	30	24x1,5	17	5,8	12,3
TN132-16/8S	S	16	8	630	37	34	19	30	24x1,5	17	6,3	12,8

Nr katalogowy TN132	Seria	Ø D1 mm	Ø D2 mm	Ciśnienie pracy bar	L1 mm	L2 mm	CH2 mm	CH3 mm	Ø F1 mm	CH mm	Waga 100 szt. kg TN132	Waga 100 szt. kg TN132A
1B-132AS1610Y	S	16	10	630	36,5	35	22	30	24x1,5	19	7,7	14,2
1B-132AS1612Y	S	16	12	630	36,5	35	24	30	24x1,5	22	8,2	14,7
1B-132AS1614Y	S	16	14	630	38	38	27	30	24x1,5	24	9,8	16,3
TN132-20/6S	S	20	6	400	43	36	17	36	30x2	22	7,9	18,1
TN132-20/8S	S	20	8	400	43	36	19	36	30x2	22	8,4	18,6
TN132-20/10S	S	20	10	400	42,5	37	22	36	30x2	22	9,5	19,7
1B-132AS2012Y	S	20	12	400	42,5	37	24	36	30x2	22	10,4	20,6
1B-132AS2014Y	S	20	14	400	44	40	27	36	30x2	24	12,5	22,7
1B-132AS2016Y	S	20	16	400	43,5	40	30	36	30x2	27	13,9	24,1
TN132-25/6S	S	25	6	400	47	38	17	46	36x2	27	11	31,5
1B-132AS2508Y	S	25	8	400	47	38	19	46	36x2	27	11,6	32,1
1B-132AS2510Y	S	25	10	400	46,5	39	22	46	36x2	27	11,7	33,2
1B-132AS2512Y	S	25	12	400	46,5	39	24	46	36x2	27	13,3	33,8
1B-132AS2514Y	S	25	14	400	48	42	27	46	36x2	27	15,7	36,2

Nr katalogowy TN132	Seria	Ø D1 mm	Ø D2 mm	Ciśnienie pracy bar	L1 mm	L2 mm	CH2 mm	CH3 mm	Ø F1 mm	CH mm	Waga 100 szt. kg TN132	Waga 100 szt. kg TN132A
1B-I32AS2516Y	S	25	16	400	47,5	42	30	46	36x2	27	16,5	37
1B-I32AS2520Y	S	25	20	400	47,5	45	36	46	36x2	32	20,5	41
TN132-30/6S	S	30	6	400	49	37	17	50	42x2	32	14,9	38
TN132-30/8S	S	30	8	400	49	37	19	50	42x2	32	15,9	39
TN132-30/10S	S	30	10	400	48,5	38	22	50	42x2	32	16,9	40
1B-I32AS3012Y	S	30	12	400	48,5	38	24	50	42x2	32	17,5	40,6
TN132-30/14S	S	30	14	400	50	41	27	50	42x2	32	19,4	42,5
TN132-30/16S	S	30	16	400	49,5	41	30	50	42x2	32	20,5	43,6
TN132-30/20S	S	30	20	400	49,5	45	36	50	42x2	32	24,7	47,8
TN132-30/25S	S	30	25	400	50	48	46	50	42x2	41	36,5	59,3
TN132-38/6S	S	38	6	315	56	38	17	60	52x2	41	22,7	55,7
TN132-38/8S	S	38	8	315	56	38	19	60	52x2	41	22,9	55,9
TN132-38/10S	S	38	10	315	55,5	39	22	60	52x2	41	24,8	57,8
TN132-38/12S	S	38	12	315	56,5	39	24	60	52x2	41	25,3	58,3

Nr katalogowy TN132	Seria	Ø D1 mm	Ø D2 mm	Ciśnienie pracy bar	L1 mm	L2 mm	CH2 mm	CH3 mm	Ø F1 mm	CH mm	Waga 100 szt. kg TN132	Waga 100 szt. kg TN132A
TN132-38/14S	S	38	14	315	57	42	27	60	52x2	41	27,3	60,3
TN132-38/16S	S	38	16	315	56,5	42	30	60	52x2	41	28,6	61,6
TN132-38/20S	S	38	20	315	56,5	46	36	60	52x2	41	32,5	65,5
TN132-38/25S	S	38	25	315	57	49	46	60	52x2	41	44,2	77,2
1B-132AS3830Y	S	38	30	315	57,5	52	50	60	52x2	46	47,7	80,3