




Złącze Proste Rk2080

Liczba wariantów: **21**

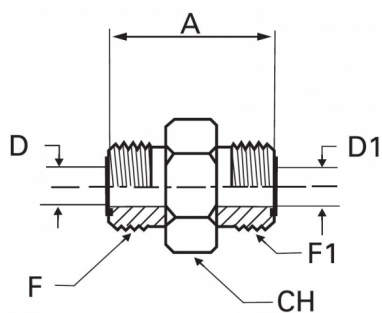

ZESKANUJ MNIE

Warianty produktu

Kod towaru	T Ø mm	T Ø cal	F	J	A mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2080-06-06	06	1/4	9/16-18	9/16-18	27,5	5	5	17	630	840
RK2080-08-08	08	5/16	11/16-16	11/16-16	31	6,5	6,5	19	630	840
RK2080-10-06	10	3/8	11/16-16	9/16-16	29,5	6,5	5	19	630	840
RK2080-10-10	10	3/8	11/16-16	11/16-16	31	6,5	6,5	19	630	840
RK2080-12-10	12	1/2	13/16-16	11/16-16	34	9,5	6,5	22	630	840
RK2080-12-12	12	1/2	13/16-16	11/16-16	35,5	9,5	9,5	22	630	840
RK2080-14-14	14	-	1-14	1-14	42,5	12,5	12,5	27	400	530
RK2080-15-15	15	-	1-14	1-14	42,5	12,5	12,5	27	400	530
RK2080-16-12	16	5/8	1-14	13/16-16	40	12,5	9,5	27	400	530
RK2080-16-16	16	5/8	1-14	1-14	42,5	12,5	12,5	27	400	530
RK2080-18-18	18	-	1-3/16-12	1-3/16-12	47	15,5	15,5	32	400	530
RK2080-20-16	20	3/4	1-3/16-12	1-14	45,5	15,5	12,5	32	400	530
RK2080-20-20	20	3/4	1-3/16-12	1-3/16-12	47	15,5	15,5	32	400	530

Kod towaru	T Ø mm	T Ø cal	F	J	A mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2080-22-22	22	-	1-7/16-12	1-7/16-12	49,5	20,5	20,5	41	400	530
RK2080-25-20	25	1	1-7/16-12	1-3/16-12	49,5	20,5	15,5	41	400	530
RK2080-25-25	25	1	1-7/16-12	1-7/16-12	49,5	20,5	20,5	41	400	530
RK2080-28-28	28	-	1-11/16-12	1-11/16-12	51,5	26	26	46	250	330
RK2080-30-30	30	-	1-11/16-12	1-11/16-12	51,5	26	26	46	250	330
RK2080-32-32	32	1 1/4	1-11/16-12	1-11/16-12	51,5	26	26	46	250	330
RK2080-35-35	35	-	2-12	2-12	53	32	32	55	250	330
RK2080-38-38	38	1 1/2	2-12	2-12	53	32	32	55	250	330