




Przyłącze Proste Npt / Orfs Rk2130

Liczba wariantów: **32**

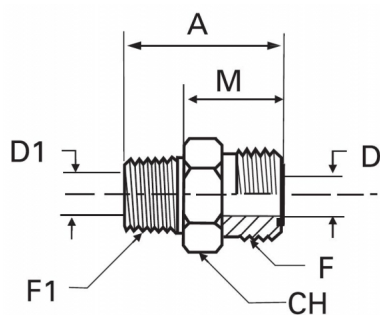

ZESKANUJ MNIE

Warianty produktu

Kod towaru	T Ø mm	T Ø cal	F	F1	A mm	M mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2I30-06-10	06	1/4	9/16-18	1/8-27	27	21	5	5	17	400	530
RK2I30-06-13	06	1/4	9/16-18	1/4-18	32	23,5	5	7	17	400	530
RK2I30-06-17	06	1/4	9/16-18	3/8-18	33,5	25,5	5	10,5	19	400	530
RK2I30-08-13	08	5/16	11/16-16	1/4-18	31,8	23	6,5	6,5	19	400	530
RK2I30-08-17	08	5/16	11/16-16	3/8-18	34	17	6,5	10,5	19	400	530
RK2I00-08-21	08	5/16	11/16-16	1/2-14	39,5	25	6,5	13,5	22	400	530
RK2I30-10-13	10	3/8	11/16-16	1/4-18	32	17,4	6,5	6,5	19	400	530
RK2I30-10-17	10	3/8	11/16-16	3/8-18	34	25	6,5	10,5	19	400	530
RK2I30-10-21	10	3/8	11/16-16	1/2-14	39,5	27,5	6,5	13,5	22	400	530
RK2I30-12-17	12	1/2	13/16-16	3/8-18	37,5	28,5	9,5	10,5	22	400	530
RK2I30-12-21	12	1/2	13/16-16	1/2-14	41,5	30	9,5	13,5	22	400	530
RK2I30-12-26	12	1/2	13/16-16	3/4-14	43	30,5	9,5	18,5	30	330	430
RK2I30-14-21	14	-	1-14	1/2-14	46	34,5	12,5	13,5	27	330	530

Kod towaru	T Ø mm	T Ø cal	F	F1	A mm	M mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2I30-14-26	14	-	1-14	3/7-14	46,5	34	12,5	18,5	30	330	530
RK2I30-15-21	15	-	1-14	1/2-14	46	34,5	12,5	13,5	27	330	530
RK2I30-15-26	15	-	1-14	3/7-14	46,5	34	12,5	18,5	30	330	530
RK2I30-16-21	16	5/8	1-14	1/2-14	46	34,5	12,5	13,5	27	330	530
RK2I30-16-26	16	5/8	1-14	3/4-14	46,5	34	12,5	18,5	30	330	430
RK2I30-18-21	18	-	1-3/16-12	1/2-14	49	37,5	15,5	13,5	32	400	530
RK2I30-18-26	18	-	1-3/16-12	3/4-14	49	37	15,5	13,5	32	330	430
RK2I30-18-33	18	-	1-3/16-12	1-11 1/2	54	39,5	15,5	27	36	210	280
RK2I30-20-21	20	3/4	1-3/16-12	1/2-14	49	37,5	15,5	13,5	32	400	530
RK2I30-20-26	20	3/4	1-3/16-12	3/4-14	49	37	15,5	13,5	32	330	430
RK2I30-20-33	20	3/4	1-3/16-12	1-11 1/2	54	39,5	15,5	27	36	210	280
RK2I30-22-26	22	-	1-7/12-12	3/4-14	51	36,5	20,5	18,5	38	210	280
RK2I30-22-33	22	-	1-7/12-12	1-11 1/2	55,5	41	20,5	24	38	210	280
RK2I30-25-33	25	1	1-7/12-12	1-11 1/2	55,5	41	20,5	24	38	210	280
RK2I30-28-42	28	-	1-11/16-12	1-1/4 11 1/2	58,5	43,5	26	32	48	210	280

Kod towaru	T Ø mm	T Ø cal	F	F1	A mm	M mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2I30-30-42	30	-	1-11/16-12	1-1/4 11 1/2	58,5	43,5	26	32	48	210	280
RK2I30-32-42	32	1 1/4	1-11/16-12	1-1/4 11 1/2	58,5	43,5	26	32	48	210	280
RK2I30-35-42	35	-	2-12	1-1/2 11 1/2	61	46	32	38	55	150	250
RK2I30-38-48	38	1 1/2	2-12	1-1/2 11 1/2	61	46	32	38	55	150	250