




Przyłącze Kątowe Unf / Orfs Rk2540

Liczba wariantów: **50**

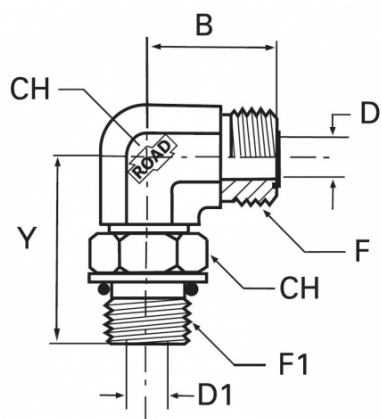

ZESKANUJ MNIE

Warianty produktu

Kod towaru	T Ø mm	T Ø cal	F	F1	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2540-06-11	06	1/4	9/16-18	7/16-20	21,5	33	5	4,4	14	400	530
RK2540-06-14	06	1/4	9/16-18	9/16-18	23,5	36,8	5	6,5	19	400	530
RK2540-08-11	08	5/16	11/16-16	7/16-20	25	34,8	6,5	4,4	19	400	530
RK2540-08-14	08	5/16	11/16-16	9/16-18	25	36,8	6,5	6,5	19	400	530
RK2540-08-19	08	5/16	11/16-16	3/4-16	26,5	40,6	6,5	9,5	19	400	530
RK2540-08-22	08	5/16	11/16-16	7/8-14	29,2	50	6,5	12,3	27	400	530
RK2540-10-11	10	3/8	11/16-16	7/16-20	25	34,8	6,5	4,4	19	400	530
RK2540-10-14	10	3/8	11/16-16	9/16-18	25	36,8	6,5	6,5	19	400	530
RK2540-10-19	10	3/8	11/16-16	3/4-16	26,5	40,6	6,5	9,5	19	400	530
RK2540-10-22	10	3/8	11/16-16	7/8-14	29,2	50	6,5	12,3	27	400	530
RK2540-12-14	12	1/2	13/16-16	9/16-18	28	38,5	9,5	6,5	19	400	530
RK2540-12-19	12	1/2	13/16-16	3/4-16	28	40,6	9,5	9,5	19	400	530
RK2540-12-22	12	1/2	13/16-16	7/8-14	38,8	50	9,5	12,3	27	400	530

Kod towaru	T Ø mm	T Ø cal	F	F1	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2540-12-27	12	1/2	13/16-16	1-1/16-12	33,5	50	9,5	15,5	30	400	530
RK2540-14-19	14	-	1-14	3/4-16	33,5	45,7	12,5	9,5	27	400	530
RK2540-14-22	14	-	1-14	7/8-14	33,5	50	12,5	12,3	27	400	530
RK2540-14-27	14	-	1-14	1-1/16-12	33,8	55,1	12,5	15,5	30	400	530
RK2540-15-19	15	-	1-14	3/4-16	33,5	45,7	12,5	9,5	27	400	530
RK2540-15-22	15	-	1-14	7/8-14	33,5	50	12,5	12,3	27	400	530
RK2540-15-27	15	-	1-14	1-1/16-12	33,8	55,1	12,5	15,5	30	400	530
RK2540-16-19	16	5/8	1-14	3/4-16	33,5	45,7	12,5	9,5	27	400	530
RK2540-16-22	16	5/8	1-14	7/8-14	33,5	50	12,5	12,5	27	400	530
RK2540-16-27	16	5/8	1-14	1-1/16-12	33,8	55,1	12,5	15,5	30	400	530
RK2540-18-19	18	-	1-3/16-12	3/4-16	37,5	46,7	15,5	9,5	30	400	530
RK2540-18-22	18	-	1-3/16-12	7/8-14	37,5	51	15,5	12,3	30	400	530
RK2540-18-27	18	-	1-3/16-12	1-1/16-12	38,5	55,1	15,5	15,5	30	400	530
RK2540-18-33	18	-	1-3/16-12	1-5/16-12	41,2	59,7	15,5	20,5	36	400	530
RK2540-20-19	20	3/4	1-3/16-12	3/4-16	37,5	46,7	15,5	9,5	30	400	530

Kod towaru	T Ø mm	T Ø cal	F	F1	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2540-20-22	20	3/4	1-3/16-12	7/8-14	37,5	51	15,5	12,3	30	400	530
RK2540-20-27	20	3/4	1-3/16-12	1-1/16-12	38,5	55,1	15,5	15,5	30	400	530
RK2540-20-33	20	3/4	1-3/16-12	1-5/16-12	41,2	59,7	15,5	20,5	36	400	530
RK2540-22-27	22	-	1-7/16-12	1-1/16-12	41,5	59	20,5	15,5	36	400	530
RK2540-22-33	22	-	1-7/16-12	1-5/16-12	41,5	59,7	20,5	20,5	36	400	530
RK2540-22-42	22	-	1-7/16-12	1-5/8-12	44,5	62,2	20,5	26	41	250	330
RK2540-25-27	25	1	1-7/16-12	1-1/16-12	41,5	59	20,5	15,5	36	400	530
RK2540-25-33	25	1	1-7/16-12	1-5/16-12	41,5	59,7	20,5	20,5	36	400	530
RK2540-25-42	25	1	1-7/16-12	1-5/8-12	44,5	62,2	20,5	26	41	250	330
RK2540-28-33	28	-	1-11/16-12	1-5/16-12	44,5	61,5	26	20,5	41	250	330
RK2540-28-42	28	-	1-11/16-12	1-5/8-12	44,5	62,3	26	26	41	250	330
RK2540-28-48	28	-	1-11/16-12	1-7/8-12	49	65,8	26	32	48	250	330
RK2540-30-33	30	-	1-11/16-12	1-5/16-12	44,5	61,5	26	20,5	41	250	330
RK2540-30-42	30	-	1-11/16-12	1-5/8-12	44,5	62,3	26	26	41	250	330
RK2540-30-48	30	-	1-11/16-12	1-7/8-12	49	65,8	26	32	48	250	330

Kod towaru	T Ø mm	T Ø cal	F	F1	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2540-32-33	32	1 1/4	1-11/16-12	1-5/16-12	44,5	61,5	26	20,5	41	250	330
RK2540-32-42	32	1 1/4	1-11/16-12	1-5/8-12	44,5	62,3	26	26	41	250	330
RK2540-32-48	32	1 1/4	1-11/16-12	1-7/8-12	49	65,8	26	32	48	250	330
RK2540-35-42	35	-	2-12	1-5/8-12	49	65	32	26	48	250	330
RK2540-35-48	35	-	2-12	1-7/8-12	49	66	32	32	48	250	330
RK2540-38-42	38	1 1/2	2-12	1-5/8-12	49	65	32	26	48	250	330
RK2540-38-48	38	1 1/2	2-12	1-7/8-12	49	66	32	32	48	250	330