




Przyłącze Kątowe Bsp / Orfs Rk2550

Liczba wariantów: **48**

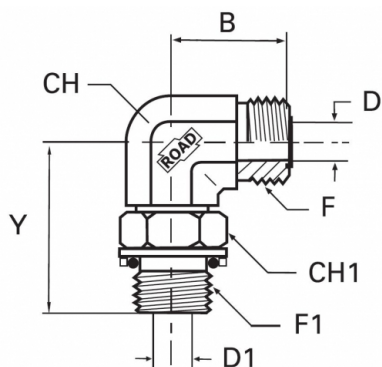

ZESKANUJ MNIE

Warianty produktu

Kod towaru	T Ø mm	T Ø cal	F	F1	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2550-06-10	06	1/4	9/16-18	1/8	21,5	30,2	5	4,4	14	320	400
RK2550-06-13	06	1/4	9/16-18	1/4	23,5	33,5	5	7,5	14	320	400
RK2550-06-17	06	1/4	9/16-18	3/8	23,5	38	5	9,9	19	320	400
RK2550-08-13	08	5/16	11/16-16	1/4	25	35,5	6,5	7,5	19	320	400
RK2550-08-17	08	5/16	11/16-16	3/8	26,5	38	6,5	9,9	19	320	400
RK2550-08-21	08	5/16	11/16-16	1/2	29,2	48,6	6,5	12,3	27	320	400
RK2550-10-13	10	3/8	11/16-16	1/4	25	35,5	6,5	7,5	19	320	400
RK2550-10-17	10	3/8	11/16-16	3/8	26,5	38	6,5	9,9	19	320	400
RK2550-10-21	10	3/8	11/16-16	1/2	29,2	48,6	6,5	12,3	27	320	400
RK2550-12-13	12	1/2	13/16-16	1/4	28	35,5	9,5	7,5	19	320	400
RK2550-12-17	12	1/2	13/16-16	3/8	28	38	9,5	9,9	19	320	400
RK2550-12-21	12	1/2	13/16-16	1/2	30,8	48,6	9,5	12,3	27	320	400
RK2550-12-26	12	1/2	13/16-16	3/4	33,5	51,4	9,5	15,5	30	250	330

Kod towaru	T Ø mm	T Ø cal	F	F1	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2550-14-17	14	-	1-14	3/8	33,5	40,7	12,5	9,5	27	320	400
RK2550-14-21	14	-	1-14	1/2	33,5	48,6	12,5	12,3	27	320	400
RK2550-14-26	14	-	1-14	3/4	35,8	51,4	12,5	15,5	30	320	400
RK2550-14-33	14	-	1-14	1	39,7	58,4	12,5	21,5	36	320	400
RK2550-15-17	15	-	1-14	3/8	33,5	40,7	12,5	9,5	27	320	400
RK2550-15-21	15	-	1-14	1/2	33,5	48,6	12,5	12,3	27	320	400
RK2550-15-26	15	-	1-14	3/4	35,8	51,4	12,5	15,5	30	320	400
RK2550-15-33	15	-	1-14	1	39,7	58,4	12,5	21,5	36	320	400
RK2550-16-17	16	5/8	1-14	3/8	33,5	40,7	12,5	9,9	27	320	400
RK2550-16-21	16	5/8	1-14	1/2	33,5	48,6	12,5	12,3	27	320	400
RK2550-16-26	16	5/8	1-14	3/4	35,8	51,4	12,5	15,5	30	320	400
RK2550-16-33	16	5/8	1-14	1	39,7	58,4	12,5	21,5	36	320	400
RK2550-18-21	18	-	1-3/16-12	1/2	37,5	49,5	15,5	12,3	30	320	400
RK2550-18-26	18	-	1-3/16-12	3/4	37,5	51,4	15,5	15,5	30	250	330
RK2550-18-33	18	-	1-3/16-12	1	41,2	58,4	15,5	21,5	36	320	400

Kod towaru	T Ø mm	T Ø cal	F	F1	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2550-20-21	20	3/4	1-3/16-12	1/2	37,5	49,5	15,5	12,3	30	320	400
RK2550-20-26	20	3/4	1-3/16-12	3/4	37,5	51,4	15,5	15,5	30	250	330
RK2540-20-33	20	3/4	1-3/16-12	1	41,2	58,4	15,5	21,5	36	320	400
RK2550-22-26	22	-	1-7/16-12	3/4	44,5	55,9	25	15,5	36	250	330
RK2550-22-33	22	-	1-7/16-12	1	41,5	58,4	20,5	21,5	36	250	330
RK2550-22-42	22	-	1-7/16-12	1-1/4	44,5	60,9	20,5	27,5	41	180	250
RK2550-25-26	25	1	1-7/16-12	3/4	44,5	55,9	25	15,5	36	250	330
RK2550-25-33	25	1	1-7/16-12	1	41,5	58,4	20,5	21,5	36	250	330
RK2550-25-42	25	1	1-7/16-12	1-1/4	44,5	60,9	20,5	27,5	41	180	250
RK2550-28-33	28	-	1-3/16-12	1	44,5	60,9	26	21,5	41	250	400
RK2550-28-42	28	-	1-3/16-12	1-1/4	44,5	60,9	26	27,5	41	180	250
RK2550-28-48	28	-	1-3/16-12	1-1/2	49	64,7	26	33	48	180	250
RK2550-30-33	30	-	1-3/16-12	1	44,5	60,9	26	21,5	41	250	400
RK2550-30-42	30	-	1-3/16-12	1-1/4	44,5	60,9	26	27,5	41	180	250
RK2550-30-48	30	-	1-3/16-12	1-1/2	49	64,7	26	33	48	180	250

Kod towaru	T Ø mm	T Ø cal	F	F1	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2550-32-33	32	1 1/4	1-3/16-12	1	44,5	60,9	26	21,5	41	250	400
RK2550-32-42	32	1 1/4	1-3/16-12	1-1/4	44,5	60,9	26	27,5	41	180	250
RK2550-32-48	32	1 1/4	1-3/16-12	1-1/2	49	64,7	26	33	48	180	250
RK2550-35-48	35	-	2-12	1-1/2	49	64,7	32	33	48	180	250
RK2550-38-48	38	1 1/2	2-12	1-1/2	49	64,7	32	33	48	180	250