




Przyłącze Kątowe Metryk / Orfs Rk2560 Iso 6149-2

Liczba wariantów: **31**

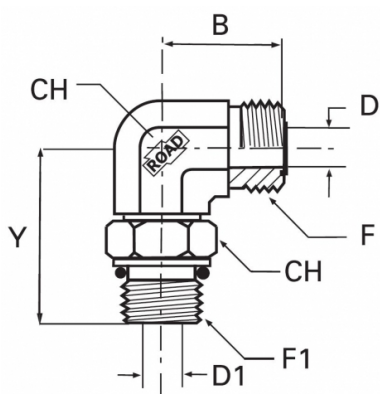

ZESKANUJ MNIE

Warianty produktu

Kod towaru	T Ø mm	T Ø cal	F	F1	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2560-06-12	06	1/4	9/16-18	M12x1,5	21,5	33	5	4	14	400	530
RK2560-06-14	06	1/4	9/16-18	M14x1,5	24	33,5	5	6	19	400	530
RK2560-08-12	08	5/16	11/16-16	M12x1,5	25	33,5	6,5	4	19	400	530
RK2560-08-14	08	5/16	11/16-16	M14x1,5	25	35,5	6,5	6	19	400	530
RK2560-08-16	08	5/16	11/16-16	M16x1,5	25	37,5	6,5	7	19	400	530
RK2560-10-12	10	3/8	11/16-16	M12x1,5	25	33,5	6,5	4	19	400	530
RK2560-10-14	10	3/8	11/16-16	M14x1,5	25	35,5	6,5	6	19	400	530
RK2560-10-16	10	3/8	11/16-16	M16x1,5	25	37,5	6,5	7	19	400	530
RK2560-12-14	12	1/2	13/16-16	M14x1,5	28	36	9,5	6	19	400	530
RK2560-12-18	12	1/2	13/16-16	M18x1,5	28	41	9,5	9	19	400	530
RK2560-12-22	12	1/2	13/16-16	M22x1,5	31	49	9,5	12	27	400	530
RK2560-14-18	14	-	1-14	M18x1,5	33,5	47,5	12,5	9	27	400	530
RK2560-14-22	14	-	1-14	M22x1,5	33,5	49	12,5	12	27	400	530

Kod towaru	T Ø mm	T Ø cal	F	FI	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2560-15-18	15	-	1-14	M18x1,5	33,5	47,5	12,5	9	27	400	530
RK2560-15-22	15	-	1-14	M22x1,5	33,5	49	12,5	12	27	400	530
RK2560-16-18	16	5/8	1-14	M18x1,5	33,5	47,5	12,5	9	27	400	530
RK2560-16-22	16	5/8	1-14	M22x1,5	33,5	49	12,5	12	27	400	530
RK2560-18-22	18	-	1-3/16-12	M22x1,5	33,5	49,5	15,5	12	30	400	530
RK2560-18-27	18	-	1-3/16-12	M27x2	37,5	55,5	15,5	15	30	400	530
RK2560-20-22	20	3/4	1-3/16-12	M22x1,5	33,5	49,5	15,5	12	30	400	530
RK2560-20-27	20	3/4	1-3/16-12	M27x2	37,5	55,5	15,5	15	30	400	530
RK2560-22-33	22	-	1-7/16-12	M33x2	41,5	59,5	20,5	20	36	400	530
RK2560-25-33	25	1	1-7/16-12	M33x2	41,5	59,5	20,5	20	36	400	530
RK2560-28-33	28	-	1-11/16-12	M33x2	44,5	62	26	20	41	250	330
RK2560-28-42	28	-	1-11/16-12	M42x2	44,5	63	26	26	41	250	330
RK2560-30-33	30	-	1-11/16-12	M33x2	44,5	62	26	20	41	250	330
RK2560-30-42	30	-	1-11/16-12	M42x2	44,5	63	26	26	41	250	330
RK2560-32-33	32	1 1/4	1-11/16-12	M33x2	44,5	62	26	20	41	250	330

Kod towaru	T Ø mm	T Ø cal	F	F1	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2560-32-42	32	1 1/4	1-11/16-12	M42x2	44,5	63	26	26	41	250	330
RK2560-35-48	35	-	2-12	M48x2	49	71,5	32	32	48	250	330
RK2560-38-48	38	1 1/2	2-12	M48x2	49	71,5	32	32	48	250	330