




Przyłącze Trójnikowe Bsp / Unf Rk2590

Liczba wariantów: **23**

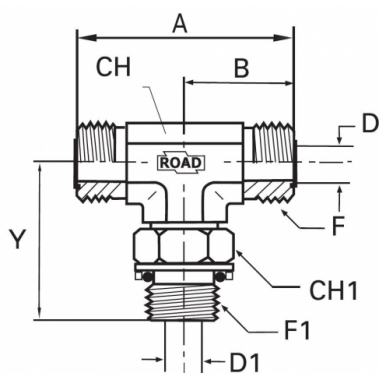

ZESKANUJ MNIE

Warianty produktu

Kod towaru	T Ø mm	T Ø cal	F	F1	A mm	B mm	Y mm	D mm	D1 mm	CH mm	CH1 mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2590-06-10	06	1/8	9/16-18	1/8	43	21,5	30,2	5	4,4	14	14	320	400
RK2590-06-13	06	1/4	9/16-18	1/4	47	23,5	36	5	7,5	19	19	320	400
RK2590-08-13	08	5/16	11/16-16	1/4	50	25	36	5,7	7,5	19	19	320	400
RK2590-08-17	08	5/16	11/16-16	3/8	53	26,5	38	6,5	9,9	19	22	320	400
RK2590-10-13	10	3/8	11/16-16	1/4	50	25	36	5,7	7,5	19	19	320	400
RK2590-10-17	10	5/16	11/16-16	3/8	53	26,5	38	6,5	9,9	19	22	320	400
RK2590-12-17	12	1/2	13/16-16	3/8	56	28	38	9,5	9,9	19	22	320	400
RK2590-12-21	12	1/2	13/16-16	1/2	56	28	38	9,5	12,3	19	27	320	400
RK2590-14-21	14	-	1-14	1/2	67	33,5	48,6	12,5	12,3	27	27	320	400
RK2590-14-26	14	-	1-14	3/4	71,6	35,8	51,5	12,5	12,5	30	36	250	330
RK2590-15-21	15	-	1-14	1/2	67	33,5	48,6	12,5	12,3	27	27	320	400
RK2590-15-26	15	-	1-14	3/4	71,6	35,8	51,5	12,5	12,5	30	36	250	330
RK2590-16-21	16	5/8	1-14	1/2	67	33,5	48,6	12,5	12,3	27	27	320	400
RK2590-16-26	16	5/8	1-14	3/4	71,6	35,8	51,5	12,5	12,5	30	36	250	330

Kod towaru	T Ø mm	T Ø cal	F	F1	A mm	B mm	Y mm	D mm	D1 mm	CH mm	CH1 mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2590-18-26	18	-	1-3/16-12	3/4	75	37,5	51,5	15,5	15,5	30	36	250	330
RK2590-20-26	20	3/4	1-3/16-12	3/4	75	37,5	51,5	15,5	15,5	30	36	250	330
RK2590-22-33	22	-	1-7/16-12	1	83	41,5	58,4	20,5	21,5	36	41	250	330
RK2590-25-33	25	1	1-7/16-12	1	83	41,5	58,4	20,5	21,5	36	41	250	330
RK2590-28-42	28	-	1-11/16-12	1 1/4	85	44,5	61	26	27,5	41	50	180	250
RK2590-30-42	30	-	1-11/16-12	1 1/4	85	44,5	61	26	27,5	41	50	180	250
RK2590-32-42	32	1 1/4	1-11/16-12	1 1/4	85	44,5	61	26	27,5	41	50	180	250
RK2590-35-48	35	-	2-12	1 1/2	98	49	65	32	33	50	55	180	250
RK2590-38-48	38	1 1/2	2-12	1 1/2	98	49	65	32	33	50	55	180	250