




## Przyłącze Trójnikowe Metryk / Orfs Rk2610

Liczba wariantów: **16**

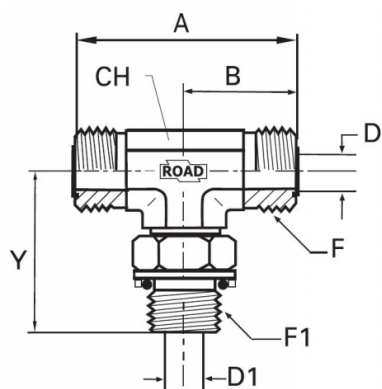

ZESKANUJ MNIE

## Warianty produktu

| Kod towaru   | T Ø<br>mm | T Ø<br>cal | F          | F1      | A<br>mm | B<br>mm | Y<br>mm | D<br>mm | D1<br>mm | CH<br>mm | Ciśnienie<br>robocze<br>bar | Ciśnienie<br>max bar |
|--------------|-----------|------------|------------|---------|---------|---------|---------|---------|----------|----------|-----------------------------|----------------------|
| RK2610-06-12 | 06        | 1/4        | 9/16-18    | M12x1,5 | 43      | 21,5    | 33      | 5       | 4,4      | 14       | 320                         | 400                  |
| RK2610-08-16 | 08        | 5/16       | 11/16-16   | M16x1,5 | 50      | 25      | 37,5    | 6,5     | 7        | 19       | 320                         | 400                  |
| RK2610-10-16 | 10        | 3/8        | 11/16-16   | M16x1,5 | 50      | 25      | 37,5    | 6,5     | 7        | 19       | 320                         | 400                  |
| RK2610-12-18 | 12        | 1/2        | 13/16-16   | M18x1,5 | 56      | 28      | 41      | 9,5     | 9        | 19       | 320                         | 400                  |
| RK2610-14-22 | 14        | -          | 1-14       | M22x1,5 | 67      | 33,5    | 48,7    | 12,5    | 12       | 27       | 320                         | 400                  |
| RK2610-15-22 | 15        | -          | 1-14       | M22x1,5 | 67      | 33,5    | 48,7    | 12,5    | 12       | 27       | 320                         | 400                  |
| RK2610-16-22 | 16        | 5/8        | 1-14       | M22x1,5 | 67      | 33,5    | 48,7    | 12,5    | 12       | 27       | 320                         | 400                  |
| RK2610-18-27 | 18        | -          | 1-3/16-12  | M27x2   | 75      | 37,5    | 55,5    | 15,5    | 15       | 30       | 250                         | 330                  |
| RK2610-20-27 | 20        | 3/4        | 1-3/16-12  | M27x2   | 75      | 37,5    | 55,5    | 15,5    | 15       | 30       | 250                         | 330                  |
| RK2610-22-33 | 22        | -          | 1-7/16-12  | M33x2   | 83      | 41,5    | 59,5    | 20,5    | 20       | 36       | 250                         | 330                  |
| RK2610-25-33 | 25        | 1          | 1-7/16-12  | M33x2   | 83      | 41,5    | 59,5    | 20,5    | 20       | 36       | 250                         | 330                  |
| RK2610-28-42 | 28        | -          | 1-11/16-12 | M42x2   | 89      | 44,5    | 63      | 26      | 26       | 41       | 180                         | 250                  |
| RK2610-30-42 | 30        | -          | 1-11/16-12 | M42x2   | 89      | 44,5    | 63      | 26      | 26       | 41       | 180                         | 250                  |

| Kod towaru   | T Ø<br>mm | T Ø<br>cal | F          | F1    | A<br>mm | B<br>mm | Y<br>mm | D<br>mm | D1<br>mm | CH<br>mm | Ciśnienie<br>robocze<br>bar | Ciśnienie<br>max bar |
|--------------|-----------|------------|------------|-------|---------|---------|---------|---------|----------|----------|-----------------------------|----------------------|
| RK2610-32-42 | 32        | 1 1/4      | 1-11/16-12 | M42x2 | 89      | 44,5    | 63      | 26      | 26       | 41       | 180                         | 250                  |
| RK2610-35-48 | 35        | -          | 2-12       | M48x2 | 98      | 49      | 73,5    | 32      | 32       | 48       | 180                         | 250                  |
| RK2610-38-48 | 38        | 1 1/2      | 2-12       | M48x2 | 98      | 49      | 73,5    | 32      | 32       | 48       | 180                         | 250                  |