




Przyłącze Trójnikowe Unf / Orfs Rk2620

Liczba wariantów: **16**

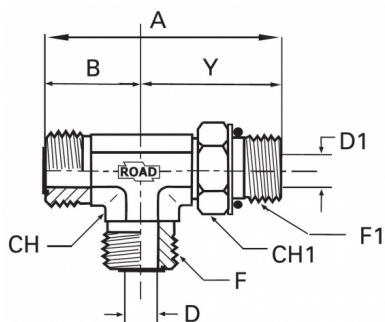

ZESKANUJ MNIE

Warianty produktu

Kod towaru	T Ø mm	T Ø cal	F	F1	A mm	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2620-06-11	06	1/4	9/16-18	7/16-20	54,5	21,5	33	5	4,4	14	400	530
RK2620-08-14	08	5/16	11/16-16	9/16-18	61,8	25	36,8	6,5	6,7	19	400	530
RK2620-10-14	10	3/8	11/16-16	9/16-18	61,8	25	36,8	6,5	6,7	19	400	530
RK2620-12-19	12	1/2	13/16-16	3/4-16	68,6	28	40,6	9,5	9,5	19	400	530
RK2620-14-22	14	-	1-14	7/8-14	83,5	33,5	50	12,5	12,3	27	400	530
RK2620-15-22	15	-	1-14	7/8-14	83,5	33,5	50	12,5	12,3	27	400	530
RK2620-16-22	16	5/8	1-14	7/8-14	83,5	33,5	50	12,5	12,3	27	400	530
RK2620-18-27	18	-	1-3/16-12	1-1/16-12	92,6	37,5	55,1	15,5	15,5	30	400	530
RK2620-20-27	20	3/4	1-3/16-12	1-1/16-12	92,6	37,5	55,1	15,5	15,5	30	400	530
RK2620-22-33	22	-	1-7/16-12	1-5/16-12	101,2	41,5	59,7	20,5	20,5	36	315	510
RK2620-25-33	25	1	1-7/16-12	1-5/16-12	101,2	41,5	59,7	20,5	20,5	36	315	510
RK2620-28-42	28	-	1-11/16-12	1-5/8-12	106,8	44,5	62,3	26	26	41	250	330
RK2620-30-42	30	-	1-11/16-12	1-5/8-12	106,8	44,5	62,3	26	26	41	250	330
RK2620-32-42	32	1 1/4	1-11/16-12	1-5/8-12	106,8	44,5	62,3	26	26	41	250	330

Kod towaru	T Ø mm	T Ø cal	F	F1	A mm	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2620-35-48	35	-	2-12	1-7/8-12	114,8	49	65,8	32	32	48	250	330
RK2620-38-48	38	1 1/2	2-12	1-7/8-12	114,8	49	65,8	32	32	48	250	330