




Przyłącze Trójnikowe Bsp / Orfs Rk2630

Liczba wariantów: **25**

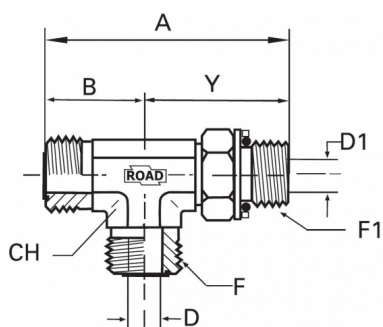

ZESKANUJ MNIE

Warianty produktu

Kod towaru	T Ø mm	T Ø cal	F	F1	A mm	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2630-06-10	06	1/8	9/16-18	1/8	51,5	21,5	30	5	4,4	14	320	400
RK2630-06-13	06	1/4	9/16-18	1/4	54,5	21,5	33	5	7,5	14	320	400
RK2630-08-13	08	5/16	11/16-16	1/4	61	25	36	6,5	7,5	19	320	400
RK2630-08-17	08	5/16	11/16-16	3/8	64,5	26,5	38	6,5	9,9	19	320	400
RK2630-10-13	10	3/8	11/16-16	1/4	61	25	36	6,5	7,5	19	320	400
RK2630-10-17	10	3/8	11/16-16	3/8	64,5	26,5	38	6,5	9,9	19	320	400
RK2630-12-17	12	1/2	13/16-16	3/8	66	28	38	9,5	9,5	19	320	400
RK2630-12-21	12	1/2	13/16-16	1/2	79,3	30,8	48,5	9,5	12,3	27	320	400
RK2630-14-21	14	-	1-14	1/2	82	33,5	48,5	12,5	12,3	27	320	400
RK2630-14-26	14	-	1-14	3/4	87,5	36	51,5	12,5	15,5	30	250	330
RK2630-15-21	15	-	1-14	1/2	82	33,5	48,5	12,5	12,3	27	320	400
RK2630-15-26	15	-	1-14	3/4	87,5	36	51,5	12,5	15,5	30	250	330
RK2630-16-21	16	5/8	1-14	1/2	82	33,5	48,5	12,5	12,3	27	320	400

Kod towaru	T Ø mm	T Ø cal	F	F1	A mm	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2630-16-26	16	5/8	1-14	3/4	87,5	36	51,5	12,5	15,5	30	250	330
RK2630-18-26	18	-	1-3/16-12	3/4	89	37,5	55,1	15,5	15,5	30	250	330
RK2630-18-33	18	-	1-3/16-12	1	100	41,5	58,5	15,5	21,5	36	250	330
RK2630-20-26	20	3/4	1-3/16-12	3/4	89	37,5	55,1	15,5	15,5	30	250	330
RK2630-20-33	20	3/4	1-3/16-12	1	100	41,5	58,5	15,5	21,5	36	250	330
RK2630-22-33	22	-	1-7/16-12	1	100	41,5	58,5	20,5	21,5	36	250	330
RK2630-25-33	25	1	1-7/16-12	1	100	41,5	58,5	20,5	20,5	36	250	330
RK2630-28-42	28	-	1-11/16-12	1 1/4	105,5	44,5	61	26	27,5	41	180	250
RK2630-30-42	30	-	1-11/16-12	1 1/4	105,5	44,5	61	26	27,5	41	180	250
RK2630-32-42	32	1 1/4	1-11/16-12	1 1/4	105,5	44,5	61	26	27,5	41	180	250
RK2630-35-48	35	-	2-12	1 1/2	114	49	65	32	33	50	180	250
RK2630-38-48	38	1 1/2	2-12	1 1/2	114	49	65	32	33	50	180	250