




Przyłącze Trójnikowe Metryk / Orfs Rk2650 Iso 3852-1

Liczba wariantów: **16**

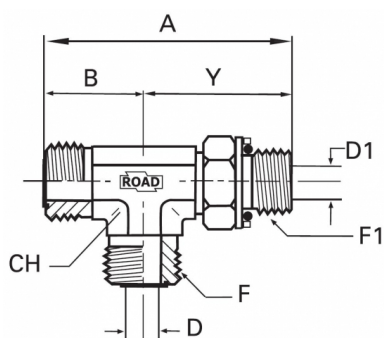

ZESKANUJ MNIE

Warianty produktu

Kod towaru	T Ø mm	T Ø cal	F	F1	A mm	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2650-06-12	06	1/4	9/16-18	M12x1,5	54,5	21,5	33	5	4	14	320	400
RK2650-08-16	08	5/16	11/16-16	M16x1,5	62,5	25	37,5	6,5	7	19	320	400
RK2650-10-16	10	3/8	11/16-16	M16x1,5	62,5	25	37,5	6,5	7	19	320	400
RK2650-12-18	12	1/2	13/16-16	M18x1,5	69	28	41	9,5	9	19	320	400
RK2650-14-22	14	-	1-14	M22x1,5	82,5	33,5	49	12,5	12	24	320	400
RK2650-15-22	15	-	1-14	M22x1,5	82,5	33,5	49	12,5	12	24	320	400
RK2650-16-22	16	5/8	1-14	M22x1,5	82,5	33,5	49	12,5	12	24	320	400
RK2650-18-27	18	-	1-3/16-12	M27x2	93	37,5	55,5	15,5	15	27	250	330
RK2650-20-27	20	3/4	1-3/16-12	M27x2	93	37,5	55,5	15,5	15	27	250	330
RK2650-22-33	22	-	1-7/16-12	M33x2	101	41,5	59,5	20,5	20	36	180	250
RK2650-25-33	25	1	1-7/16-12	M33x2	101	41,5	59,5	20,5	20	36	180	250
RK2650-28-42	28	-	1-11/16-12	M42x2	107,5	44,5	63	26	26	41	180	250
RK2650-30-42	30	-	1-11/16-12	M42x2	107,5	44,5	63	26	26	41	180	250

Kod towaru	T Ø mm	T Ø cal	F	F1	A mm	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2650-32-42	32	1 1/4	1-11/16-12	M42x2	107,5	44,5	63	26	26	41	180	250
RK2650-35-48	35	-	2-12	M48x2	117,5	49	68,5	32	32	50	180	250
RK2650-38-48	38	1 1/2	2-12	M48x2	117,5	49	68,5	32	32	50	180	250