




Przyłącze Kolankowe 45° Unf / Orfs Rk2660

Liczba wariantów: **37**

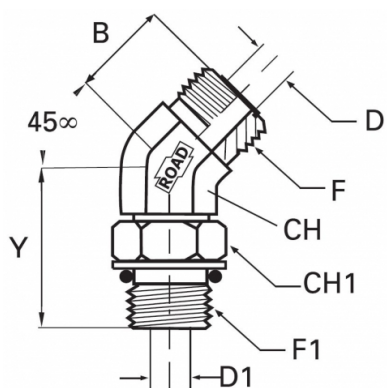

ZESKANUJ MNIE

Warianty produktu

Kod towaru	T Ø mm	T Ø cal	F	F1	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2660-06-11	06	1/4	9/16-18	7/16-20	16	30	5	4,4	14	400	530
RK2660-06-14	06	1/4	9/16-18	9/16-18	17,3	33	5	6,5	19	400	530
RK2660-08-11	08	5/16	11/16-16	7/16-20	19	31	6,5	4,4	19	400	530
RK2660-08-14	08	5/16	11/16-16	9/16-18	19	33	6,5	6,5	19	400	530
RK2660-08-19	08	5/16	11/16-16	3/4-16	19	36,3	6,5	9,5	19	400	530
RK2660-10-11	10	3/8	11/16-16	7/16-20	19	31	6,5	4,4	19	400	530
RK2660-10-14	10	3/8	11/16-16	9/16-18	19	33	6,5	6,5	19	400	530
RK2660-10-19	10	3/8	11/16-16	3/4-16	19	36,3	6,5	9,5	19	400	530
RK2660-12-14	12	1/2	13/16-16	9/16-18	20,5	32,2	9,5	6,5	19	400	530
RK2660-12-19	12	1/2	13/16-16	3/4-16	20,5	36,3	9,5	9,5	19	400	530
RK2660-12-22	12	1/2	13/16-16	7/8-14	21	44,7	9,5	12,3	27	400	530
RK2660-14-19	14	-	1-14	3/4-16	24,4	40,4	12,5	9,5	27	400	530
RK2660-14-22	14	-	1-14	7/8-14	23,5	44,7	12,5	12,3	27	400	530

Kod towaru	T Ø mm	T Ø cal	F	F1	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2660-14-27	14	-	1-14	1-1/16-12	24,9	50	12,5	15,5	30	400	530
RK2660-15-19	15	-	1-14	3/4-16	24,4	40,4	12,5	9,5	27	400	530
RK2660-15-22	15	-	1-14	7/8-14	23,5	44,7	12,5	12,3	27	400	530
RK2660-15-27	15	-	1-14	1-1/16-12	24,9	50	12,5	15,5	30	400	530
RK2660-16-19	16	5/8	1-14	3/4-16	24,4	40,4	12,5	9,5	27	400	530
RK2660-16-22	16	5/8	1-14	7/8-14	23,5	44,7	12,5	12,3	27	400	530
RK2660-16-27	16	5/8	1-14	1-1/16-12	24,9	50	12,5	15,5	30	400	530
RK2660-18-22	18	-	1-3/16-12	7/8-14	26	46	15,5	12,3	30	400	530
RK2660-18-27	18	-	1-3/16-12	1-1/16-12	26	50	15,5	20,5	36	400	530
RK2660-18-33	18	-	1-3/16-12	1-5/16-12	29,5	52,5	15,5	20,5	36	380	570
RK2660-20-22	20	3/4	1-3/16-12	7/8-14	26	46	15,5	12,3	30	400	530
RK2660-20-27	20	3/4	1-3/16-12	1-1/16-12	26	50	15,5	20,5	36	400	530
RK2660-20-33	20	3/4	1-3/16-12	1-5/16-12	29,5	52,5	15,5	20,5	36	380	570
RK2660-22-27	22	-	1-7/16-12	1-1/16-12	30	51,6	20,5	15,5	36	400	530
RK2660-22-33	22	-	1-7/16-12	1-5/16-12	30	52,5	20,5	20,5	36	380	570

Kod towaru	T Ø mm	T Ø cal	F	F1	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2660-22-41	22	-	1-7/16-12	1-5/8-12	32	53,5	20,5	26	41	250	450
RK2660-25-27	25	1	1-7/16-12	1-1/16-12	30	51,6	20,5	15,5	36	400	530
RK2660-25-33	25	1	1-7/16-12	1-5/16-12	30	52,5	20,5	20,5	36	380	570
RK2660-25-41	25	1	1-7/16-12	1-5/8-12	32	53,5	20,5	26	41	250	450
RK2660-28-41	28	-	1-11/16-12	1-5/8-12	32	54	26	26	41	250	450
RK2660-30-41	30	-	1-11/16-12	1-5/8-12	32	54	26	26	41	250	450
RK2660-32-41	32	1 1/4	1-11/16-12	1-5/8-12	32	54	26	26	41	250	450
RK2660-35-48	35	-	2-12	1-7/8-12	37	54	32	32	50	250	330
RK2660-38-48	38	1 1/2	2-12	1-7/8-12	37	54	32	32	50	250	330