




Przyłącze Kolankowe 45° Bsp / Orfs Rk2670

Liczba wariantów: **26**

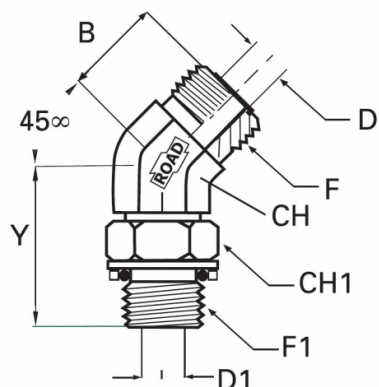

ZESKANUJ MNIE

Warianty produktu

Kod towaru	T Ø mm	T Ø cal	F	F1	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2670-06-10	06	1/4	9/16-18	1/8	16	27,5	5	4,4	14	320	400
RK2670-06-13	06	1/4	9/16-18	1/4	16	30	5	7,5	19	320	400
RK2670-08-13	08	5/16	11/16-16	1/4	18	32	6,5	7,5	19	320	400
RK2670-08-17	08	5/16	11/16-16	3/8	18	33,5	6,5	9,9	19	320	400
RK2670-08-21	08	5/16	11/16-16	1/2	19,5	43,5	6,5	12,3	27	320	400
RK2670-10-13	10	3/8	11/16-16	1/4	18	32	6,5	7,5	19	320	400
RK2670-10-17	10	3/8	11/16-16	3/8	18	33,5	6,5	9,9	19	320	400
RK2670-10-21	10	3/8	11/16-16	1/2	19,5	43,5	6,5	12,3	27	320	400
RK2670-12-17	12	1/2	13/16-16	3/8	20,5	33,5	9,5	9,9	19	320	400
RK2670-14-21	14	-	1-14	1/2	23,5	43,5	12,5	12,3	27	320	400
RK2670-14-26	14	-	1-14	3/4	24,5	46,5	12,5	15,5	30	320	400
RK2670-15-21	15	-	1-14	1/2	23,5	43,5	12,5	12,3	27	250	330
RK2670-15-26	15	-	1-14	3/4	24,5	46,5	12,5	15,5	30	250	330

Kod towaru	T Ø mm	T Ø cal	F	F1	B mm	Y mm	D mm	D1 mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2670-16-21	16	5/8	1-14	1/2	23,5	43,5	12,5	12,3	27	320	400
RK2670-16-26	16	5/8	1-14	3/4	24,5	46,5	12,5	15,5	30	250	330
RK2670-18-26	18	-	1-3/16-12	3/4	26	46,5	15,5	15,5	30	250	330
RK2670-18-33	18	-	1-3/16-12	1	29,5	51	15,5	21,5	36	250	330
RK2670-20-26	20	3/4	1-3/16-12	3/4	26	46,5	15,5	15,5	30	250	330
RK2670-20-33	20	3/4	1-3/16-12	1	29,5	51	15,5	21,5	36	250	330
RK2670-22-33	22	-	1-7/16-12	1	30	51	20,5	21,5	36	250	330
RK2670-25-33	25	1	1-7/16-12	1	30	51	20,5	21,5	36	250	330
RK2670-28-42	28	-	1-11/16-12	1 1/4	32	51,5	26	27,5	41	180	250
RK2670-30-42	30	-	1-11/16-12	1 1/4	32	51,5	26	27,5	41	180	250
RK2670-32-42	32	1 1/4	1-11/16-12	1 1/4	32	51,5	26	27,5	41	180	250
RK2670-35-48	35	-	2-12	1 1/2	37	52,5	32	33	50	180	250
RK2670-38-48	38	1 1/2	2-12	1 1/2	37	52,5	32	33	50	180	250