


Trójnik Niesymetryczny Orfs Rk2720

Liczba wariantów: **16**

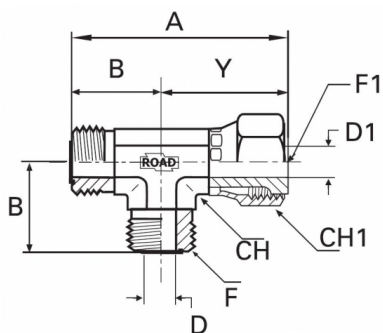

ZESKANUJ MNIE

Warianty produktu

Kod towaru	T Ø mm	T Ø cal	F	F1	A mm	B mm	Y mm	D mm	D1 mm	CH mm	CH1 mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2720-06-06	06	1/4	9/16-18	9/16-18	48	21,5	26,5	5	4,2	14	14	400	530
RK2720-08-08	08	5/16	11/16-16	11/16-16	54,5	25	29,5	6,5	6,5	19	19	400	530
RK2720-10-10	10	3/8	11/16-16	11/16-16	54,5	25	29,5	6,5	6,5	19	19	400	530
RK2720-12-12	12	1/2	13/16-16	13/16-16	66	28	38	9,5	9	19	24	400	530
RK2720-14-14	14	-	1-14	1-14	74,5	33,5	41	12,5	11,5	27	27	400	530
RK2720-15-15	15	-	1-14	1-14	74,5	33,5	41	12,5	11,5	27	27	400	530
RK2720-16-16	16	5/8	1-14	1-14	74,5	33,5	41	12,5	11,5	27	27	400	530
RK2720-18-18	18	-	1-3/16-12	1-3/16-12	84	37,5	46,5	15,5	14	30	32	400	530
RK2720-20-20	20	3/4	1-3/16-12	1-3/16-12	84	37,5	46,5	15,5	14	30	32	400	530
RK2720-22-22	22	-	1-7/16-12	1-7/16-12	95	41,5	53	20,5	20	36	38	400	530
RK2720-25-25	25	1	1-7/16-12	1-7/16-12	95	41,5	53	20,5	20	36	38	400	530
RK2720-28-28	28	-	1-11/16-12	1-11/16-12	102,5	44,5	58	26	26	41	50	250	330
RK2720-30-30	30	-	1-11/16-12	1-11/16-12	102,5	44,5	58	26	26	41	50	250	330
RK2720-32-32	32	1 1/4	1-11/16-12	1-11/16-12	102,5	44,5	58	26	26	41	50	250	330

Kod towaru	T Ø mm	T Ø cal	F	F1	A mm	B mm	Y mm	D mm	D1 mm	CH mm	CH1 mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2720-35-35	35	-	2-12	2-12	110	49	61	32	32	48	55	200	330
RK2720-38-38	38	1 1/2	2-12	2-12	110	49	61	32	32	48	55	200	330