




Trójnik Grodziowy Orfs Rk2740

Liczba wariantów: **16**

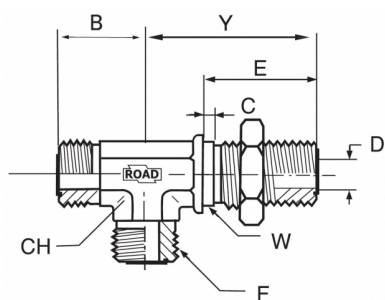

ZESKANUJ MNIE

Warianty produktu

Kod towaru	T Ø mm	T Ø cal	F	B mm	Y mm	D mm	CH mm	C mm	E mm	W mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2740-06-06	06	1/4	9/16-18	22,5	47	5	14	1,5	31,5	14,3	630	840
RK2740-08-08	08	5/16	11/16-16	26	52	6,5	19	1,5	34	17,5	630	840
RK2740-10-10	10	3/8	11/16-16	26	52	6,5	19	1,5	34	17,5	630	840
RK2740-12-12	12	1/2	13/16-16	29	55,5	9,5	19	2,5	36,5	20,6	630	840
RK2740-14-14	14	-	1-14	34,5	63	12,5	27	2,5	40,5	25,4	400	530
RK2740-15-15	15	-	1-14	34,5	63	12,5	27	2,5	40,5	25,4	400	530
RK2740-16-16	16	5/8	1-14	34,5	63	12,5	27	2,5	40,5	25,4	400	530
RK2740-18-18	18	-	1-3/16-12	38,5	67	15,5	30	3	41,5	30,2	400	530
RK2740-20-20	20	3/4	1-3/16-12	38,5	67	15,5	30	3	41,5	30,2	400	530
RK2740-22-22	22	-	1-7/16-12	42,5	71	20,5	36	3	42	36,5	400	530
RK2740-25-25	25	1	1-7/16-12	42,5	71	20,5	36	3	42	36,5	400	530
RK2740-28-28	28	-	1-11/16-12	45,5	75,5	26	41	3	42	43	250	330
RK2740-30-30	30	-	1-11/16-12	45,5	75,5	26	41	3	42	43	250	330

Kod towaru	T Ø mm	T Ø cal	F	B mm	Y mm	D mm	CH mm	C mm	E mm	W mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2740-32-32	32	1 1/4	1-11/16-12	45,5	75,5	26	41	3	42	43	250	330
RK2740-35-35	35	-	2-12	49,5	79,5	32	50	3	42	50	200	330
RK2740-38-38	38	1 1/2	2-12	49,5	79,5	32	50	3	42	50	200	330